



BETTER VALUE.
SMARTER CHOICE.

AGRIFLEX+ 354

HIGH PERFORMANCE SPRAYER TIRE IF/VF TECHNOLOGY FOR THE NEXT GENERATION OF ROW CROP FARMERS.



- Engineered with Increased Flexion (IF) and Very Increased Flexion (VF) technology
- Provides up to 20%–40% more load capacity than standard tires for higher productivity
- Allows up to 20%–40% decrease in tire pressure compared to standard tires, preventing soil compaction and field damage
- Unique tread design offering a smooth ride and long even wear
- High speed capabilities both on and off road – 40MPH
- Stubble guard compound for long tread life
- Steel belted tread area offering puncture resistance and a more uniform footprint



**LARGE FOOTPRINT, LOW SOIL COMPACTION, GREAT TRACTION.
INCREASED PRODUCTIVITY AND REDUCED COSTS.**




PREMIUM TECHNOLOGY, EVERYDAY AFFORDABILITY.

AGRIFLEX+ 354




MINIMIZE SOIL COMPACTION



IF TIRE STANDARD TIRE

STEEL BELTED

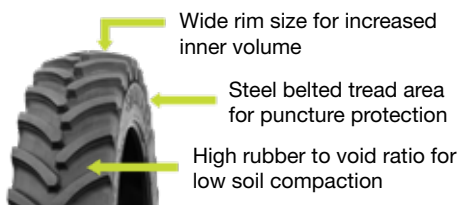

MULTI-ANGLED TREAD DESIGN

Directional tread design provides high traction and good steering



- Low rolling resistance
- Superior self-cleaning
- Center Lug Angled for Smoother Ride

Product Code	Size	Load Index	NS (32 nd)	RIM	Overall Diameter	Section Width	Rolling Circ.	Speed (MPH)	Max Load
35410005AL	VF380/85R30	146D	59	DW13	55.6	15.5	163.9	40	6610
35400105AL	VF420/90R30	153D	62	DW13	59.8	17.7	176.6	40	8040
35400009AL	VF380/85R34	149D	59	DW13	60	15.6	177.3	40	7160
35400108AL	IF420/85R34	154D	63	W14L	62	16.4	181.9	40	8250
35400017AL	VF480/70R34	160D	59	DW16L	62.2	19.5	185.8	40	9910
35400002AL	VF380/80R38	154D	59	DW13	62.6	15	185.4	40	8260
35400003AL	IF380/95R38	154D	61	DW13	66.4	15.4	195.2	40	8250
35400018AL	VF480/80R42	162D	66	DW16	72.8	19.3	216.1	40	10460
35400046AL	IF320/90R46	155D	48	W11	68.7	13	208	40	8550
35400053AL	VF320/105R46	172D	59	DW11	72.4	12.8	219.8	40	13880
35400016AL	VF380/90R46	173D	61	DW13	73	15.4	220.3	40	14320
35400062AL	VF480/80R46	164D	66	DW16	76.7	19.3	228.6	40	11010
35400033AL	VF520/85R46	170D	67	DW18	80.8	20.9	236.7	40	13220
35400049AL	IF340/85R48	159D	56	DW12	71.2	13.3	215.7	40	9650
35400133AL	VF320/90R50	166D	56	W11	72.8	12.6	221.3	40	11700
35400048AL	IF320/105R50	152D	59	DW11	76.3	12.7	228.2	40	7850
35400023AL	VF380/90R50	175D	61	DW13	77	15.2	232.1	40	15200
35400008AL	IF380/105R50	177D	60	DW13	80.8	15.7	222.7	40	16100
35400180AL	VF420/95R50	177D	60	DW14	80.8	16.7	241.4	40	16090
35400021AL	VF480/80R50	179D	66	DW16	86.1	19.1	240.7	40	17100
35400027AL	VF480/95R50	176D	66	DW16	86.1	19.1	257.9	40	15640
35400005AL	IF230/115R54	145D	58	W8	76.7	10.1	233.9	40	6400
35400034AL	IF320/90R54	162D	36	DW11	76.8	12.7	234.3	40	10500
35400055AL	IF320/105R54	167D	59	DW11	80.3	13	245.3	40	12000
35400029AL	VF380/90R54	176D	59	DW13	80.9	15	245.3	40	15650
35400205AL	IF380/105R54	180D	60	DW13	85.2	15.6	257.2	40	17600

* Please note above load index refers to high speed (40MPH) loading capabilities. Visit ATG Tire website for lower speed loading details. Visit ATG Tire website for complete size availability

VISIT ATGTIRE.COM FOR DETAILED LOAD AND PRESSURE TABLES



Distributor:

ATG develops, manufactures and markets superior quality Off-Highway tires, globally, under three well known brands: Alliance, Galaxy and Primex. Specializing in Agriculture, Construction, Forestry, Industrial, Earthmoving, OEM and OTR application tires, the group is one of the fastest growing players in the Off-Highway tire market. ATG is dedicated to providing its customers with low Total Cost of Ownership (TCO) through superior products and exceptional customer support services.



Contact Alliance Tire Americas, Inc. at (800) 343-3276 or (781) 321-3910 for your nearest Alliance Tire Dealer.



facebook.com/alliancetireamericas



@alliancetireamericas



atablogs.atgtire.com



www.atgtire.com